

# Sustainable remediation of a dumpsite

Sughosh P<sup>1</sup>, Anusree N<sup>1</sup>, Prathima B<sup>1</sup> and G L Sivakumar Babu<sup>1</sup>  
Indian Institute of Science, Bangalore-560012, Karnataka, India  
Indian Institute of Science, Bangalore-560012, Karnataka, India  
Indian Institute of Science, Bangalore-560012, Karnataka, India  
gls@iisc.ac.in

## Abstract


**Abstract.** The current practices of containing the waste in dumpsite / landfill are considered as unsustainable due to their negative impact on the environment, society and economy. Remediation of the existing open dumpsite into bioreactor landfills helps in recovering the valuable land area at a faster rate due to the reduction in the time required for waste stabilization process. The problem of leachate treatment can also be addressed effectively during the remediation process. Therefore, remediating an existing dumpsite can be classified as an approach towards achieving the sustainability in landfilling practices. In this study, an approach for remediating an existing municipal solid waste (MSW) dumpsite in Bangalore City is presented by addressing the three major aspects, viz., landfill gas (LFG), leachate and the recovery of air space. Modelling tools are used to estimate the LFG emission and to design the leachate collection and recirculation systems. The methane oxidation potential of the digested MBT waste as a biocover material are evaluated using column experiments. The biocover systems are then designed to mitigate the LFG emissions from the dumpsite.

**Keywords:** Sustainability, landfill gas, leachate recirculation, biocovers.

## 1 Introduction

As per the United States Environmental Protection Agency (US EPA, 2008), “Sustainability creates and maintains the conditions under which humans and nature can exist in productive harmony, which permits fulfilling the social, economic and other requirements of present and future generations”. Any process, product or technology can be deemed as sustainable when its impact on the social, economic and the environmental aspects are well balanced to create harmony between humans and the nature. The current waste management practices followed in low and middle income countries predominantly consists of disposal of Municipal Solid Waste (MSW) in the dumpsites and the landfills (Hoornweg and Bhada-Tata, 2012). Dumping or landfilling of MSW directly impact all the three components of the environment viz., atmosphere (landfill gas emission), hydrosphere (leachate contamination of the ground water table) and lithosphere (leachate and MSW contaminate the soil) and can be

deemed as unsustainable practice. Such practices also ignore the economic value of the waste as the energy and nutrient content of the MSW remains generally untapped. Improvement in the overall sustainability of the landfilling process can be attained by addressing the three major aspects, viz., mitigation of landfill gas (LFG), leachate treatment and the recovery of air space. The above features can easily be incorporated in a new MSW treatment facility consisting of a bioreactor landfill. From the sustainability perspective, bioreactor landfills are preferred to the open dumpsites and conventional landfills due to the social, economic and environmental considerations (Lakshmikanthan et al., 2017; Sughosh et al., 2019). In bioreactor landfills, provisions are made for leachate collection through under drainage system, leachate recirculation and collection of landfill gas from the inception stage itself. The schematic representation of the sustainability concept in landfill engineering is shown in Fig.1. In this concept, the waste treatment facility primarily consists of four bioreactor landfills operating at different waste stabilization phase. After complete stabilization of waste, the biomining activity is carried out before repeating entire process again. Additionally, all the other features which minimizes the impact on environment are incorporated in this approach.

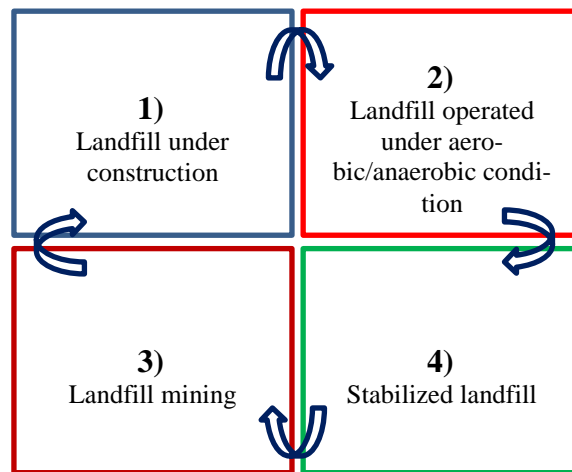

**Fig. 1.** Sustainable landfilling approach

The open dumpsites lack the features of bioreactor landfills and adopting the same for the existing dumpsites would not be possible. Alternatively, open dumps can be retrofitted by providing vertical or horizontal wells to collect and recirculate the leachate and by designing biocover systems to mitigate the landfill gas emissions.

The MSW management rules of 2016 has mandated for the remediation of the existing dumpsites in the country which is in turn a step towards achieving the sustainability in waste management practices. With this in perspective, the sustainable remediation of existing dumpsites for the Indian context is explored in this study. The overall objectives of the study are given below.

- Suggest a remediation plan for an existing MSW dumpsite of Bangalore city by providing an approach for the design of the

- leachate collection and recirculation system
- biocover system for controlling landfill gas emission

## 2 Methodology

### 2.1 Site description

Several dumpsites are being used by the Bangalore municipality for the disposal of MSW generated from the city. Based on the observations made during the site visits, it can be concluded that the problems encountered at these dumpsites are of the same type. Therefore, the approach suggested in this study is also applicable to most of the other dumpsites in Bangalore. In this study, a typical landfill of 4 acres in area and 10 - 20 m in depth with the liner system is considered. Total unsegregated municipal solid waste of around 1,00,000 tons is assumed to be dumped during the active land-filling phase (between the year 2017 and 2018). The site description for Bangalore dumpsite considered in this study is given in table 1.

**Table 1.** Site description for Bangalore dumpsite

Features of study area	
Year of start	2017
Year of closure	2018
Average waste intake (tones /year)	50,000
Area(acres)	4
Average height(m)	10-20
Precipitation(mm)	905

The problems associated with the dumpsites that were observed during the site visits are as follows. Majority of the landfills in Bangalore do not have the leachate or the gas collection systems. The landfill site considered in the study does not have a cover system, but a proper liner system is present at the bottom. The waste is dumped directly on the liners and is not compacted to achieve the target density of MSW. The provision for the leachate or the landfill gas collection systems are absent. Therefore, the waste contained in the landfill gets saturated during the rainy season and thus increases the risk of groundwater contamination. High leachate head was observed during the site visit (almost up to the surface). The LFG emissions are not controlled, which may cause fire hazards and contribute to global warming.

### 2.2 Sustainable approach

The goal of the sustainable approach is to remediate/operate the dumpsite in a way that reduces the human and environment risk in a cost-effective manner. The sustainability approach suggested in this study include:

- Landfill gas emission control

- Leachate collection system
- Leachate recirculation system
- Biomining and land space recovery

### 2.3 Landfill gas emission control

LandGEM model version 3.02 developed by USEPA is used to estimate the total landfill gas emissions from landfill site. The model parameters required for the estimation of LFG generated are the waste intake time duration, capacity of the landfill, methane generation rate ( $k$ , year<sup>-1</sup>), methane generation capacity ( $L_0$ , m<sup>3</sup>/Mg) and waste acceptance rate (USEPA 2005). The MSW composition effects the values of methane generation rate and methane generation capacity. The MSW composition of Bangalore and the derived composition of the MSW used for estimation of ultimate methane yield are given in table 2 and 3 respectively.

**Table 2.** MSW composition of Bangalore (Chanakya et al., 2009)

Waste type	Composition in percentage
Fermentable	72
Paper and cardboard	11.6
Cloth, Rubber, PVC, Leather	1.01
Glass	1.43
Polythene/plastics	6.23
Metals	0.23
Dust and sweeping	6.53
Others	-

**Table 3.** The composition of waste along with the moisture content and ultimate methane yield of each MSW fractions

Waste category	Percentage composition (% wet weight basis) <sup>a</sup>	Moisture content (%) <sup>b</sup>	Ultimate methane yield $L_0$ (m <sup>3</sup> CH <sub>4</sub> /dry Mg refuse) <sup>c</sup>
Paper	11.6	10	132.8
Textile	1.01	20	14.8
Compostable	72	45	145.1

<sup>a</sup> % composition from Chanakaya et.al. 2009

<sup>b</sup> Moisture contents from IPCC Guidelines for National Greenhouse Gas Inventories (2006).

<sup>c</sup>  $L_0$  (m<sup>3</sup> CH<sub>4</sub>/dry Mg refuse) based on values from Staley and Barlaz (2009)

## 2.4 Methane oxidation experiment in biocovers

Cover system in landfills aids in reducing odor, vectors, flies and helps in the control of storm water and leachate. In addition to these, biotic system helps in converting methane gas into carbon dioxide by oxidation when landfill gas is passed through it. This process is achieved by the action of a group of microorganism known as methanotrophs (Gebert and Groengroeft, 2006). The most widely used biotic systems are biofilters, biowindrows and biocovers. Column studies were conducted in laboratory to explore the potential of the mechanically biologically treated waste as an effective biocover material.

The MBT waste used for experiments was collected from Mavallipura landfill site and was anaerobically digested for 470 days. The details pertaining to waste sampling, characteristics and anaerobic treatment are given in Lakshmikanthan, (2016). The methane oxidation studies were carried out in a PVC column of 15.4cm diameter and 100 cm in height. The schematic diagram of the setup is shown in Fig. 2.

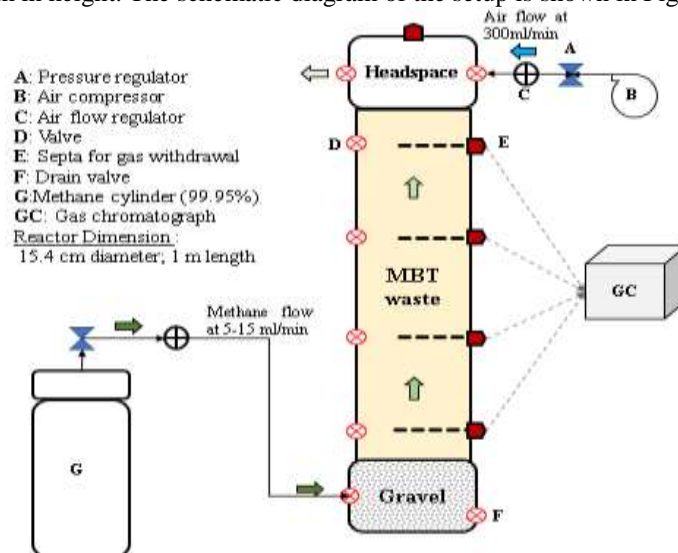


Fig. 2. Schematic diagram of column experiment for methane oxidation in biocovers

A gravel bed of 100cm was placed at the bottom of the column which acted as a support, and as the gas distribution layer. A geonet layer was placed above this and the media was filled in five layers of 5-10 cm thick. 99.95% CH<sub>4</sub> gas was fed to the bottom of the column and a constant flow rate of 13.6 mL/min was maintained by using rotameter. At the top headspace of the column, a humidified air flow of 100-300 mL/min was maintained to simulate the atmospheric boundary condition. Both the methane and air flow rates were periodically checked by using bubble flow meters. The experiment was conducted at room temperature. A provision for collecting the gas sample for the column was made with the help of a septa arrangement connected to a narrow 1 mm diameter pipe embedded in a fine cloth to filter the dust particles. This arrangement was placed all along the depth of the column. The gas samples were

analyzed using Gas Chromatograph for CO<sub>2</sub>, O<sub>2</sub>, N<sub>2</sub> and CH<sub>4</sub> concentration. The quality of gas was measured by manual injection of the sample into a portable gas chromatograph (Make–Mayura Analyticals, BGA-Model) with Thermal conductivity detector and Hydrogen as the carrier gas (30mL/min flow rate). The HayeSep-A and Molecular Sieve columns were used in series to get a clear separation of CO<sub>2</sub>, O<sub>2</sub>, N<sub>2</sub> and CH<sub>4</sub> gases. Calibration using the standard biogas mixture was performed before each test. The chromatographs were analyzed using Peak ABC software.

## 2.5 Leachate collection and recirculation system

### Quantification of leachate generated

Visual HELP (Hydrologic Evaluation of Landfill Performance) model developed by US Army corps is used to estimate amount of leachate generated in landfill site. It is quasi-two-dimensional hydrologic model of water movement across, into, through and out of landfills. Landfill systems including various combinations of vegetation, cover soils, waste cells, lateral drain layers, low permeability barrier and geomembrane liners can be modeled. The average head above the liner and the volume of leachate generated was estimated for the existing site condition. The input data for Bangalore weather conditions are used from the repository of the software. The bulk density and field capacity of the waste was 521 kg/m<sup>3</sup> and 0.3 respectively. Table 4 shows the three different condition considered for analysis in HELP model.

**Table 4.** Conditions used in the HELP Model to estimate the leachate quantity.

Layers considered in HELP model	Run 1 - Existing site condition	Run 2 - leachate collection and removal	Run 3 - leachate collection and 50% recirculation	Thickness of Each Layer, m
Surface Water Settings	Bare soil	Bare soil	Bare soil	
1. Vertical Percolation Layer	Loamy fine sand	Loamy fine sand	Loamy fine sand	0.3
2. Vertical Percolation Layer	Municipal Solid Waste	Municipal Solid Waste	Municipal Solid Waste	15
3. Lateral Drainage Layer	Gravel without drainage	Gravel with drainage	Gravel with drainage and 50 % recirculation to Layer 1	0.3
4. Geomem-	HDPE	HDPE	HDPE	0.001

brane Layer

5.	Barrier	Clay	Clay	Clay	1.0
Soil Liner					

---

horizontal trenches were considered for the design of leachate recirculation system (LRS). Hydrus 2D was used to estimate the number and the spacing of trenches in the landfill. The properties of fresh waste such as hydraulic conductivity and unsaturated properties were taken from Reddy et al., (2009) and Wu et al., (2009) respectively.

### 3 Result and discussion

#### 3.1 Landfill gas generation

The maximum total landfill gas and methane flux calculated are  $5.266 \times 10^5$  and  $2.633 \times 10^5$  m<sup>3</sup>/year respectively. The output of the LandGEM model is given in Fig. 3.

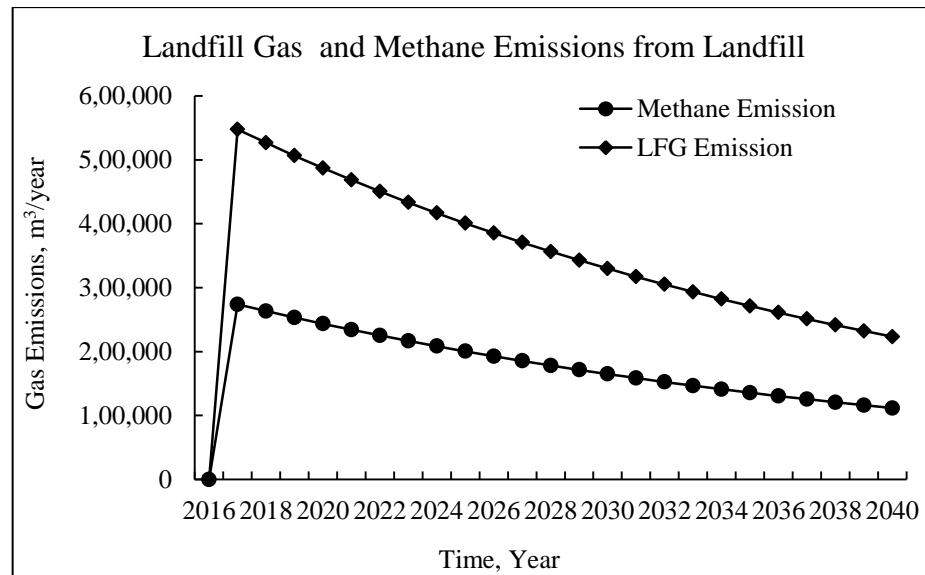



Fig. 4. Total landfill gas and methane gas emission from Landfill

#### Biocover

Biocovers are used to reduce the potential impact of direct emission of methane to the atmosphere. Biocovers systems are economically feasible and are generally used in

place of the gas extraction or flaring systems, especially in the landfills with low methane emission rates.

Fig.5. shows the methane oxidation rates (MOR) calculated from the column experiment as a function of depth. The oxidation efficiency at 20cm depth was much higher than at the bottom layers. These higher oxidation efficiencies indicated the presence of  $\text{CH}_4$ -oxidizing bacterial community in the top layers. A decrease in oxidation efficiency was observed with depth and indicated the extent of the oxic zone in the cover material. Maximum oxidation rates of 81.21% was observed in the top layers of the columns where oxygen availability was highest.

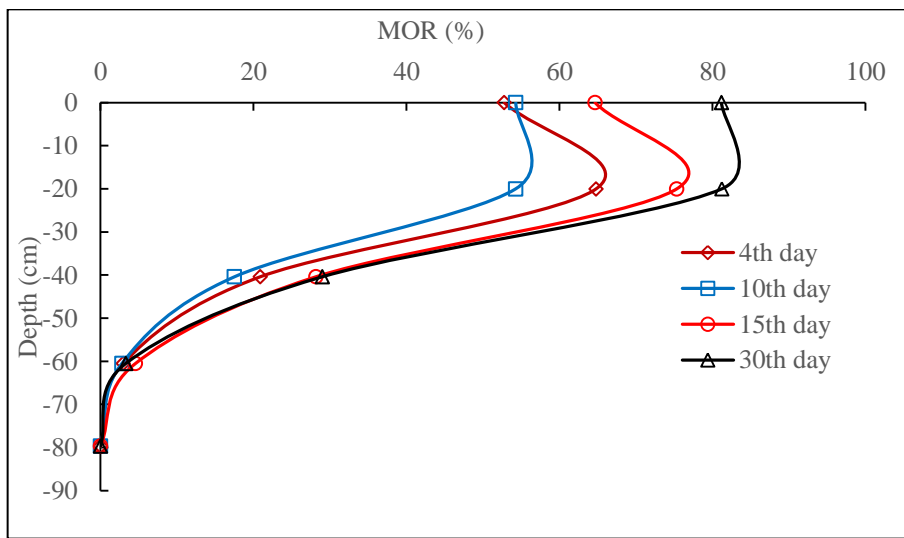

**Fig. 5.** Methane reduction potential with respect to depth

The design of biocover system involves, determining the methane emission rate at the landfill site and the lab scale studies to estimate the methane oxidation potential of the selected biocover material. From the column studies, the biocover system has a methane oxidation efficiency of 81.21% for a flux rate of  $700.35 \text{ g/m}^2/\text{d}$ . Therefore, an area of  $848 \text{ m}^2$  is required to construct a biowindrow system. The digested MBT waste of 0.8m depth with a moisture content of 30%, compacted to a bulk density of  $750 \text{ kg/m}^3$  is sufficient to oxidize the methane emission from the dumpsite.

Bio windrows of  $53 \times 53 \text{ m} \times 0.8 \text{ m}$  can be provided and will be sufficient to reduce the methane emissions from the entire landfill. Some of the other major factors affecting the performance of such bio windrows at field condition includes, climatic conditions (temperature, precipitation, etc.), moisture content, landfill gas composition and the gas application rate.



### 3.2 Leachate Generation

The Visual HELP model was run and the of yearly variation in the precipitation, evaporation, runoff, lateral drainage from layer 3 (lateral drainage layer), recirculation rate and percolation or leakage through layer 5 (barrier soil liner) were analyzed for the three conditions stated below.

#### a) Existing site condition

The Fig. 7 represent the analysis result and the average leachate head by the end of the first year was around 2.28m against the prescribed limit of 0.3m (USEPA, 2004). By the end of 10 years the value reached 15.4 m. These conditions greatly affect the stability and degradation of waste. The potential risk of ground water contamination is also high under these conditions.

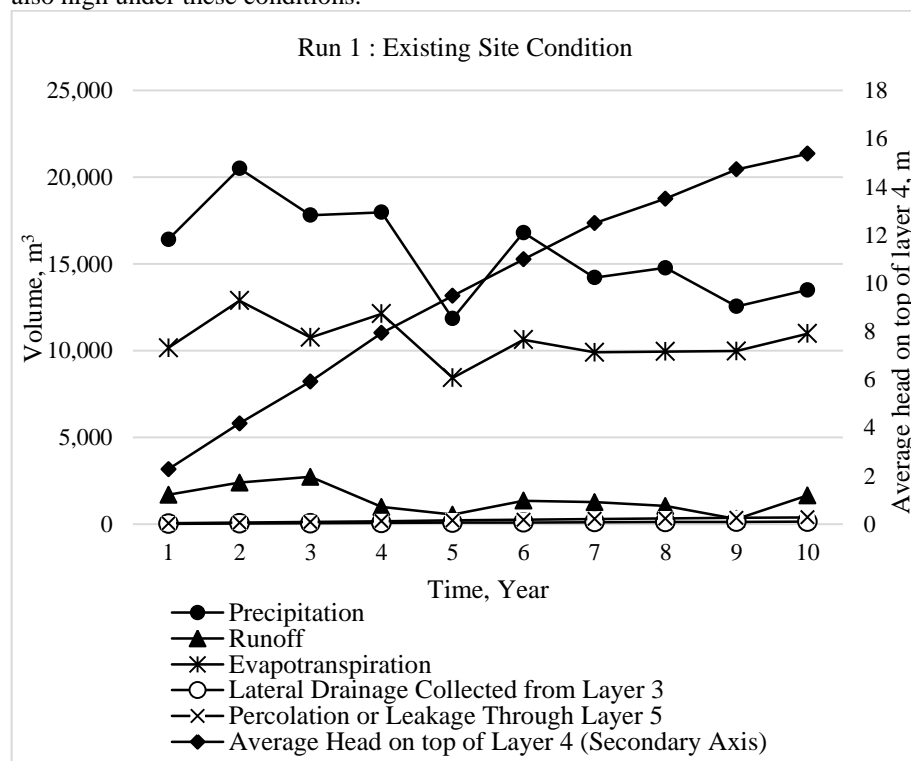


Fig. 6. HELP Model output for existing landfill site condition

#### b) Leachate collection and removal

A drastic decline in leachate head is observed when the leachate is drained from the landfill (Fig. 8). The percolation or leakage through layer 5 reduces in comparison to the previous case. This clearly indicates that, draining the leachate out of the landfill decreases the risk of groundwater pollution.


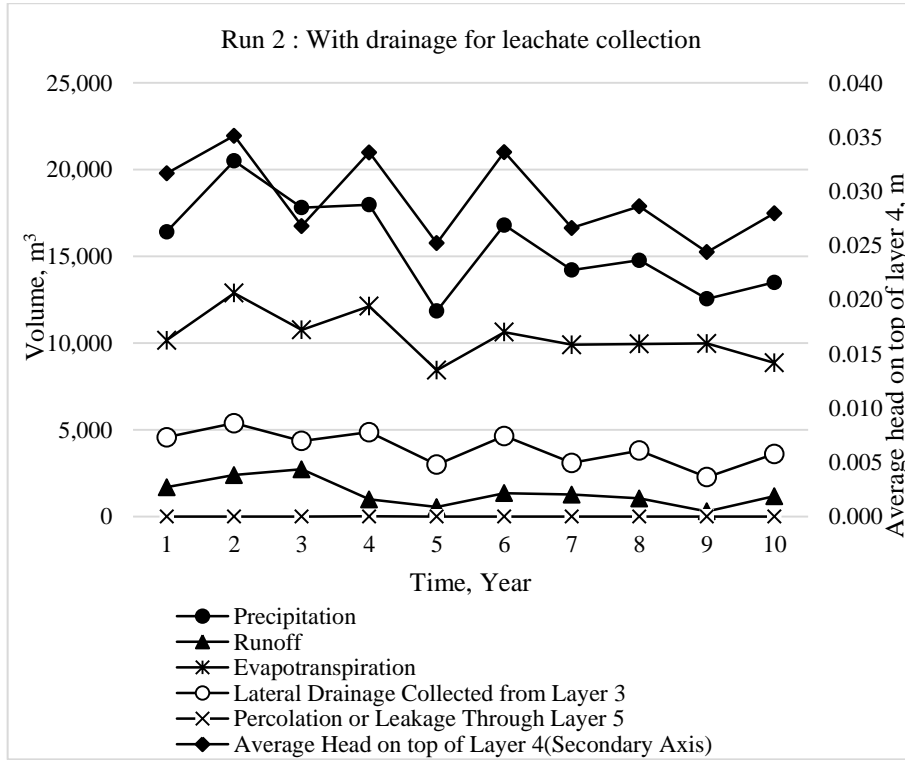


Fig. 7. HELP Model output for leachate drainage and collection

**c) Leachate collection and 50% recirculation**


The leachate head increased marginally in this condition but is within the permissible limit. Recirculation of leachate enhances the waste degradation rate and reduces the time required for stabilization of the waste. From Fig. 9, it is evident that, with 50% leachate recirculation, the average leachate head on the liner reduces and, in the process, enhances the biodegradation of waste.

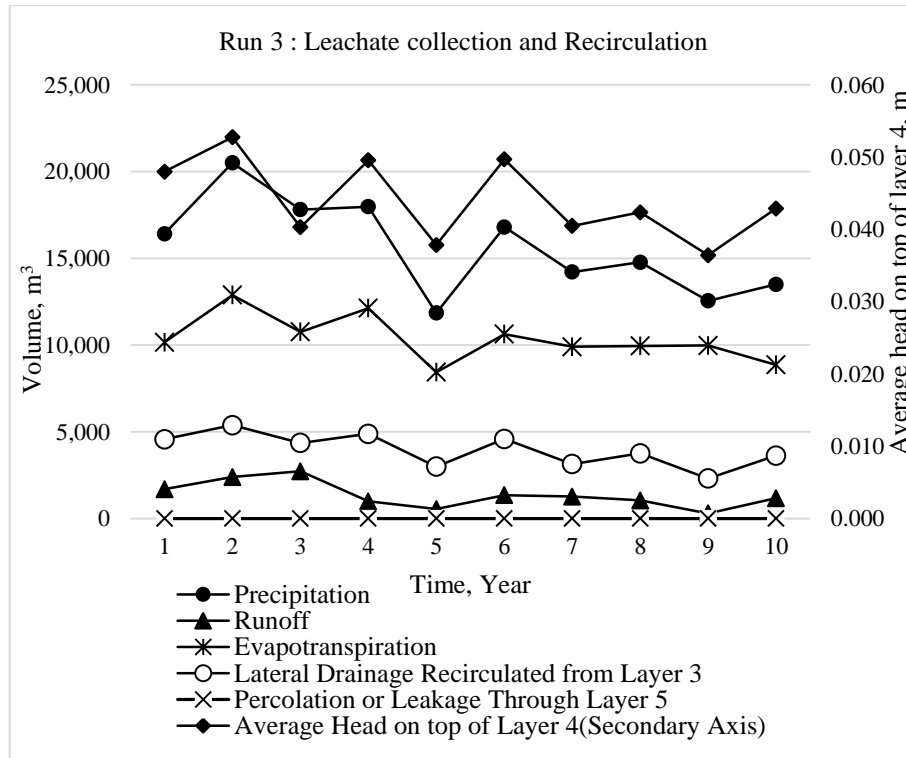

**Fig. 8.** HELP Model output for leachate drainage and collection

**Design of leachate recirculation system**

Hydrus 2D result show that the horizontal trenches with a recirculation rate of 5.5 m<sup>3</sup>/day is efficient enough to saturate the waste with a moisture content of 70% up to a distance of 10 m. Therefore, a total of 52 horizontal trenches of 10m x 0.6m x 1m dimension distributed through the landfill area are sufficient to maintain the required moisture content in waste.

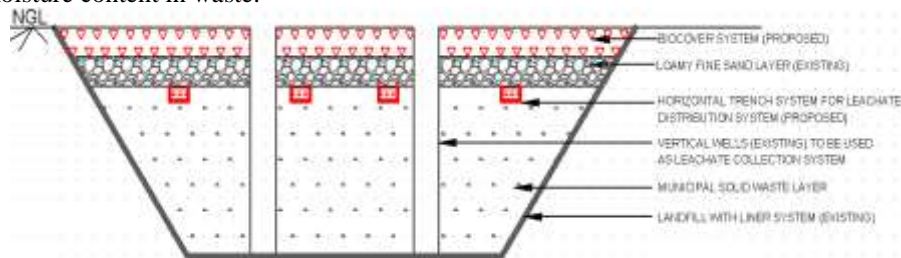

**Fig. 9.** Retrofitting of existing dumpsite in Bangalore city (NTS).

## 4 Conclusion

The study presents the approach to convert the existing dumpsite into sustainable landfill. This can be carried out by the design of leachate collection, recirculation and biocovers systems. The recirculation of the leachate can be achieved by providing 52 horizontal trenches. The landfill gas emission can be prevented by providing bio windrows of size 53 x 53 x 0.8 m. Even though the features provided to improve the performance of the landfills are site-specific, the approach presented here can easily be applied to most of the other dumpsites in India with minor modifications.

### References

1. Joshi, R., Ahmed, S.: Status and challenges of municipal solid waste management in India: A review. *Cogent Environmental Science* 2(1), 1139434 (2016).
2. Lakshmikanthan, P., Sivakumar Babu, G L.: Performance evaluation of the bioreactor landfill in treatment and stabilisation of mechanically biologically treated municipal solid waste. *Waste management & research* 35(3), 285-293 (2017).
3. Reddy, K.R., Hettiarachchi, H., Parakalla, N.S., Gangathulasi, J., Bogner, J E.: Geotechnical properties of fresh municipal solid waste at Orchard Hills Landfill, USA. *Waste Management* 29(2), 952-959(2009).
4. Scheutz, C., Pedersen, R B., Petersen, P H., Jørgensen, J H B., Ucendo, I M B., Mønster, J G., Kjeldsen, P.: Mitigation of methane emission from an old unlined landfill in Klintholm, Denmark using a passive biocover system. *Waste management* 34(7), 1179-1190 (2014).
5. Plocoste, T., Jacoby-Koaly, S., Molinié, J., Roussas, A.: Effect of Leachate Recirculation on Landfill Methane Production in a Tropical Insular Area. *Innovative Energy & Research* 5 (1), 1-5 (2016).
6. Staley, B F., Barlaz, M A.: Composition of municipal solid waste in the United States and implications for carbon sequestration and methane yield. *Journal Environmental Engineering* 135(10), 901-909, (2009).
7. Hari, D S., Krishna, R R.: *Geoenvironmental engineering: Site remediation, waste containment, and emerging waste management technologies*. John Wiley and Sons, (2004).
8. Wu, H., Wang, H., Zhao, Y., Chen, T., Lu, W.: Evolution of unsaturated hydraulic properties of municipal solid waste with landfill depth and age. *Waste management* 32(3), 463-470(2012).
9. Cabral, A R., Moreira, J F V., Jugnia, L B.: Biocover performance of landfill methane oxidation: experimental results. *Journal of Environmental Engineering* 136(8), 785-793 (2009).
10. Abichou, T., Mahieu, K., Yuan, L., Chanton, J., Hater, G.: Effects of compost biocovers on gas flow and methane oxidation in a landfill cover. *Waste Management* 29(5), 1595-1601 (2009).
11. He, R., Wang, J., Xia, F F., Mao, L J., Shen, D S.: Evaluation of methane oxidation activity in waste biocover soil during landfill stabilization. *Chemosphere* 89(6), 672-679 (2012).
12. Reinhart DR, McCreanor PT, Townsend TG (2002) The bioreactor landfill: its status and future. *Waste Manage Res* 20(2):172-186
13. Reinhart DR, Amini H, Bolyard SC (2012). The role of landfills in us sustainable waste management. *Environmental Engineer: Applied Research and Practice*, vol 15, Winter 2012

14. Gebert, J., & Groenroeft, A. (2006). Passive landfill gas emission–influence of atmospheric pressure and implications for the operation of methane-oxidising biofilters. *Waste Management*, 26(3), 245-251.
15. Chanakya, H N., Ramachandra, T V., Shwetmala: Towards a sustainable waste management system for Bangalore. In: 1st International Conference on Solid Waste Management and Exhibition on Municipal Services, Urban Development, Public Works IconSWM. Kolkata, India (2009).
16. Tolaymat, T., Kremer, F., Carson, D., Davis-Hoover, W.: *Monitoring Approaches for Landfill Bioreactors*. National Risk Management Research Laboratory, Office of Research and Development, Ohio. (2004).
17. Reinhart DR, Townsend TG (1997) *Landfill bioreactor design and operation*, 1st edn. CRC, Boca Raton.
18. Campbell, I., Robinson, N.: *Landfill Methane Oxidation Technique*. Report – SC160005/R, Published by Environment Agency (2017).
19. Eggleston, S., Buendia, L., Miwa, K.: *IPCC guidelines for national greenhouse gas inventories*. Institute for Global Environmental Strategies, Kanagawa, Japan (2006).
20. Press Information Bureau, <http://pib.nic.in/newsite/PrintRelease.aspx?relid=138591>, last accessed 2019/01/22.
21. Hindustan times, <https://www.hindustantimes.com/delhi-news/ghazipur-landfill-site-collapses-in-east-delhi-one-dead-many-fear-trapped/story-oSqDJtp4zqrB0yHOWCER9J.html>, last accessed on 2018/12/20.
22. Annual report to be submitted by the State Pollution Control Board or Pollution Control Committee Committees to the Central Pollution Control Board for the year 2016-17, KSPCB.
23. US EPA, <https://www.epa.gov/landfills/bioreactor-landfills>, last accessed 2019/01/22.