

Visakhapatnam Chapter

*Proceedings of Indian Geotechnical Conference 2020
December 17-19, 2020, Andhra University, Visakhapatnam*

Numerical Analysis of the Stability of Soil Slope Subjected to Rainwater Infiltration

Bhanuprakash H. R.¹ and Adarsh S. Chatra²

Post Graduate Student, Basaveshwar Engineering College, Bagalkot-587102

E-mail: bhanuprakashhrl@gmail.com

Associate Professor, Department of Civil Engineering, Basaveshwar Engineering College,
Bagalkot-587102

E-mail: adarshchatra@gmail.com

Abstract. India is among the top ten countries with the highest percentage of landslide disaster for the past few years. Among the natural disasters rainfall induced slope failure is one of the natural disasters resulting in loss of human life and damage to public properties. In this study, Finite Difference Analysis (FDA) of unsaturated flow is carried out to investigate the response of slope subjected to rainwater infiltration. The effect of rainfall intensities and duration on pore pressure generation, degree of saturation, slope stability and evolution of strains during rainfall event for homogeneous finite slope is investigated. A parametric sensitive analysis is performed considering different rainfall intensities applied over the soil slope. Results indicate that the rainfall intensity and duration has a negative effect on factor of safety (FOS), significant effect on pore-water pressure, saturation and FOS values.

Keywords: Unsaturated Soil, Rainfall Intensity, Finite Difference Analysis, Pore Pressure, Slope Stability, FLAC

1 Introduction

Slope failures and landslides are one of the major geological processes occurring frequently in the world. Landslides affect 15 % of the land area of India. The term, 'landslide' is defined as the movement of a mass of a rock, debris, or earth down a slope under the influence of gravity (Cruden, 1991). The subject of stability analysis of rain-induced failures in soil is an interesting, important and challenging one in geotechnical engineering. The slope failures and landslides occur when hill slopes become mechanically unstable, because of geologic and hydro geologic processes and pose a serious threat to human life and built environments. The procedure of rainwater intrusion into the soil and its movement in unsaturated soils have been studied by hydrologists, geologists and geotechnical engineers by carrying out the field and numerical examinations (Ng et al. 2003). The physics-based and numerical models are capable of reproducing the physical processes during rainfall intrusion and failure initiation in the variably saturated soils during the process of slope failures and subsequent mass movement. Landslides are also referred as landslips, slump or slope

failure. These landslides not just cause extensive damage to the property but also cause loss of lives. The triggering factors responsible for landslides are rainfall, rapid snow melt, earthquakes and anthropogenic activities.

Pope and Anderson (1984) studied unsaturated flow into a hydrological model to investigate the stability of a typical slope in Hong Kong. Authors concluded that saturated permeability is not constant value in the unsaturated zone and is function of the degree of saturation. Collins and Znidarcic (2004) investigated the failure mechanisms of slopes subjected to rainwater infiltration. Significant build up of positive pore-water pressure in the soil due to rise of groundwater leading to failure. Authors concluded slope failure is mainly because of reduction in shear strength of soil due to reduction in the magnitude of matric suction. Farshidfar and Nayeri (2015) in their study, slope stability analysis is carried out by applying finite element technique using shear strength reduction method. The analysis is performed at both static and pseudo-static modes using PLAXIS software. Authors concluded that, the results obtained at lower angles of internal friction are almost identical, however, with the internal friction angle of soil increasing, FEM obtains bigger safety factor. Wang and Zhang (2019) investigated the effects of rainfall duration, rainfall intensity and soil weakening on stability of slope. Seepage-stress coupling model is used to examine an actual disastrous event in Yulin China. Authors conclude that the safety factor drops sharply at first and then gradually declines to 1.05 during additional two days of intense rainfall indicating slope is at the verge of failure. Gidon and Sahoo (2020) conducted numerous studies and used many innovative techniques to understand the problems due to slope instability under rainfall. Authors suggested that bamboos can be widely used as a reinforcement material for soil stabilization. The process of rain water infiltration into the soil and its movement in unsaturated soils have been studied by several researches by carrying out numerical simulations (Chatra et al, 2019; Rabie, 2014; Cai and Ugai, 2004; Ng and Shi, 1998).

The study presented in this paper focuses on relationship between the stability of soil slope and rainfall intensity and duration. The effects of hydraulic characteristics of soil, rainfall intensity and duration on the stability of soil slopes are studied in detail. The main rainfall events are applied to the slope right after the application of the antecedent rainfall. The antecedent rainfall is applied to simulate the initial conditions normal just before the occurrence of the major rainfall events. The variations in pore-water pressure in slopes under different rainfalls are calculated using Finite Difference Analysis (FDA) of transient water flow through unsaturated soils. These pore-water pressures are then used along with the strength reduction technique to calculate the Factor of Safety (FOS) using FDA. All the finite difference calculations have been performed using FLAC (2011).

2 Slope Geometry and Boundary Conditions

In this study the slope geometry mechanical and hydraulic properties that are considered. Figure 1 shows the Finite Difference (FD) mesh of homogeneous slope having specific slope geometry and boundary conditions. The slope angle of 35° , slope height of 8 m and initial height of groundwater table from the bottom of the slope is taken as 6 m in the analysis. The boundary conditions utilized for the seepage analysis. Along the sides of the slope below the water table, a boundary condition equal to the total head is applied.

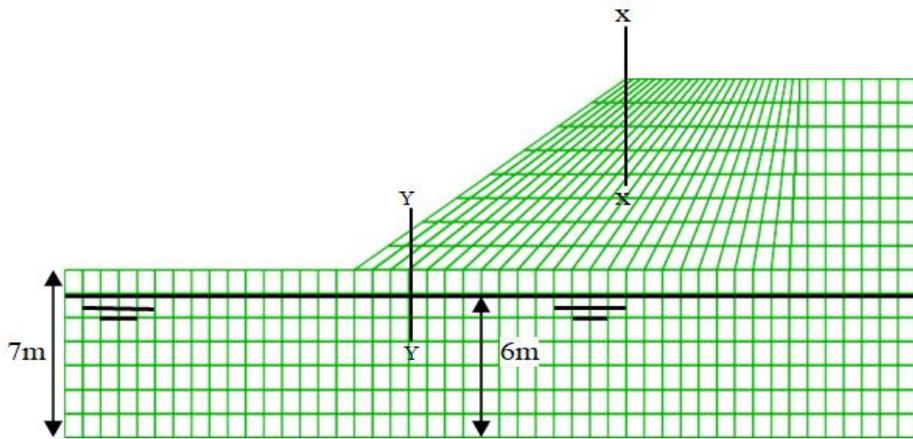


Fig.1.Finite difference mesh of finite slope

3 Initial Conditions

Firstly, an antecedent total rainfall of 2565.7 mm ($I = 8.133 \times 10^{-8}$ m/s) prior to the main rainfall event is applied to the surface of slope for one year in order to simulate the antecedent groundwater conditions in the slope section. The pore water pressure, degree of saturation, shear strain etc. are calculated at the end of the main rainfall events. The plots corresponding to the above response variables are drawn against the time from the slope surface at the selected locations in the top (Section x-x) and bottom (Section y-y) portion of the slope.

4 Soil Properties

For FDA, the slope section having the following soil properties is considered. The Mohr-Coulomb soil parameters and van Genuchten hydraulic parameters are given in Table 1 and 2 respectively. The soil properties are considered to study the response slope subjected to main rainfall event. The rainfall is applied after the antecedent

conditions created in the slope section. The properties of the soil types are given in Table 2, in which γ_d = dry unit weight, n = porosity, ϕ' = friction angle P_0 = Scaling suction m = Shape parameter and θ_r = Residual saturation.

Table 1. Soil parameters for Mohr-Coulomb model.

Soil Property	Measured Value	Unit
Mechanical parameters		
Bulk modulus (K)	12.7	MPa
Shear modulus (G)	3.91	MPa
Effective cohesion	3.1	kPa
Effective friction angle	26	Degrees

Table 2. Mechanical and hydraulic properties of the soil.

Soil Property	Measured Value	Unit
Young's modulus (E)	10.7	MPa
Poisson's ratio (μ)	0.37	
Cohesion (c')	3.1	kPa
Shape parameter (m)	0.86	
Scaling suction (P_0)	9.81	kPa
Residual saturation (θ_r)	0.0954	

5 Results and Discussion

The typical rainfall intensities ($I=4.05 \times 10^{-7}$, 1.39×10^{-6} , 1.119×10^{-6} , 1.10×10^{-6} , 1.38×10^{-6} m/s) are applied on the slope section to study the effects of rainfall intensities on the stability. Before the application of these main rainfall intensities, an antecedent rainfall of 2565.7 mm ($I = 8.133 \times 10^{-8}$ m/s) in one year period is applied over the slope section. The above mentioned rainfall intensities are applied over the homogeneous soil slope. The pore water pressure at time, $t = 0$ h represents the pore water pressure measured after the antecedent rainfall. After the application of main rainfall event, the increase in pore water pressure is observed for the soil slopes. The results in the form of variations in pore water pressure distribution, degree of saturation, shear strain increment at Sections x-x and y-y are provided.

5.1 Effect of rainfall on pore water pressure generation

An antecedent total rainfall of 2565.7 mm ($I = 8.133 \times 10^{-8}$ m/s) is applied to the slope section up to one year period in order to simulate the antecedent groundwater conditions prior to the main rainfall event. Figure 2(a) and (b) shows the evolution of pore water pressures with rainfall duration. Figure 2(a) shows the variation of pore pressure at (Section x-x). The variations in pore pressures at 1, 2 and 3m depth are -9.8, -10.67 and -8.4 kPa, respectively, at time $t = 0$ h. At time $t = 120$ h, the pore pressure values at 1, 2 and 3m depth are -0.77, 5.7 and 8.51 kPa, respectively. Figure

2(b) shows the variation of pore pressure at (Section y–y).The pore pressure up to 48h increases. There after the pore pressure remains constant.

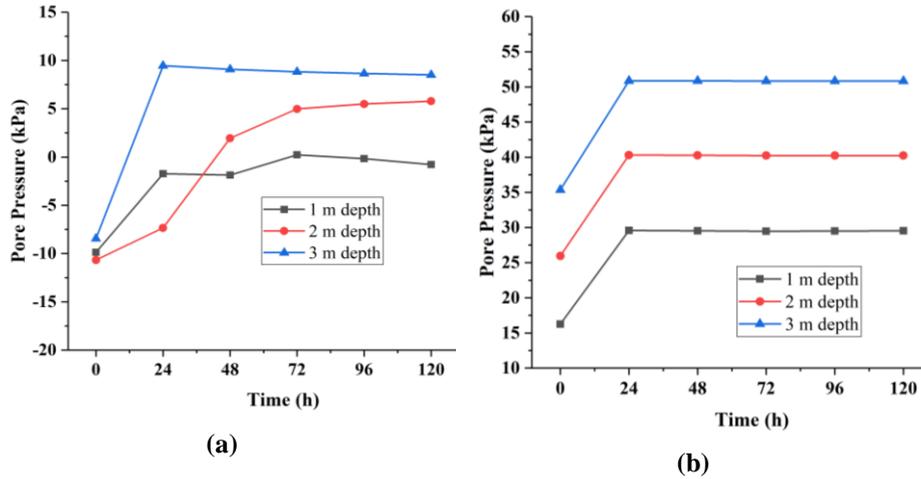


Fig.2. (a) Variation of pore pressure at Section x-x (b) Variation of pore pressure at Section y-y

5.2 Effect of rainfall on stability of slope

The changes in FOS values with rainfall duration for the slope sections are shown in Figure 3. The rate of decrease in FOS values as the rainfall duration increases. For the slope section a FOS of 1.41 is obtained at the end of antecedent rainfall duration (i.e. $t = 0$ h).The FOS values at time $t = 18$ h reduces to unity indicating slope is on the verge of failure. Further increase in rainfall duration the FOS values reduces less than unity indicating slope has failed. For the same slope with rainfall duration at time $t = 120$ h i.e. end of rainfall the FOS value reduced to 0.537.

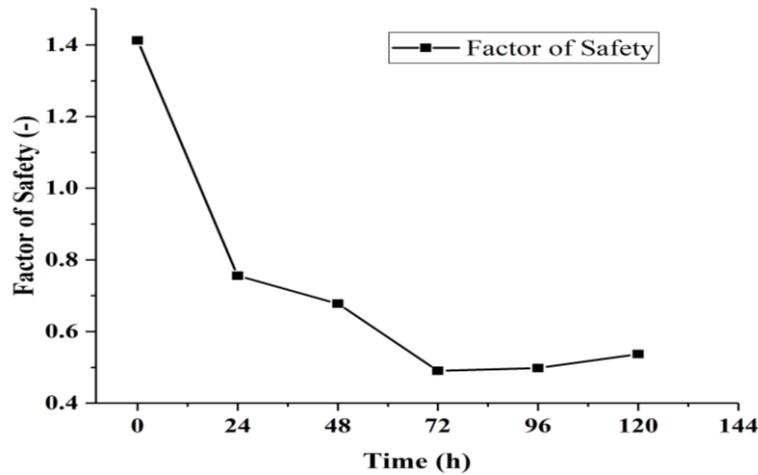


Fig.3. Variation of factor of safety with time.

5.3 Effect of rainfall on degree of saturation

Figure 4(a) and (b) show the variations of degree of saturation with time. Figure 4(a) shows the variation of degree of saturation at (Section x-x). At 1m depth the degree of saturation gradually increases. At 3 m depth the degree of saturation increases from 49% to 100%, there after the degree of saturation remains constant. Figure 4(b) shows the variation of degree of saturation for (Section y-y). The rain water infiltrated all along the depth of the slope thereby fully saturating the slope.

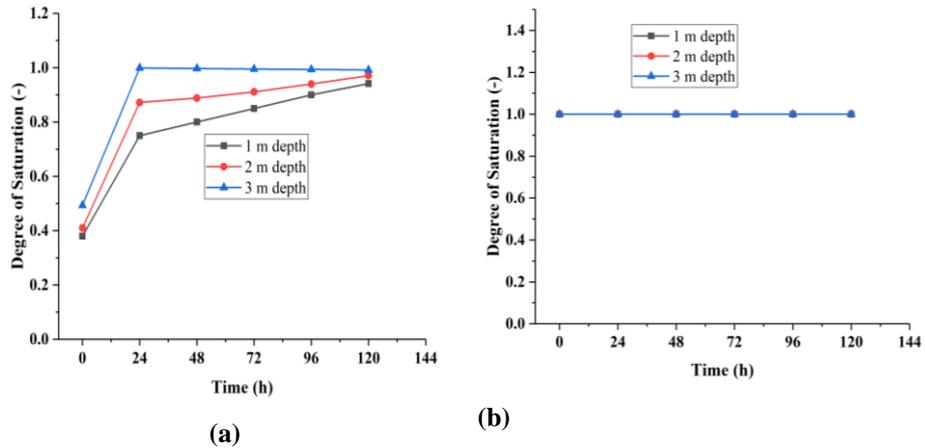


Fig.4. (a) Variation of degree of saturation at Section x-x, (b) Variation of degree of saturation at Section y-y.

5.4 Strain response of slope during rainfall

The rainfall infiltration which leads to decrease in matric suction also changes the shear strength and unit weight of the soil. The plots of shear strain increment with time are shown in Figure 5(a) and (b). Figure 5(a) depicts the variation of shear strain increment along (Section x-x). At 1, 2 and 3 m depth the shear strain increment increases gradually. Figure 5(b) depicts the variation of shear strain increment along (Section y-y). The shear strain increment increases and there after remain constant.

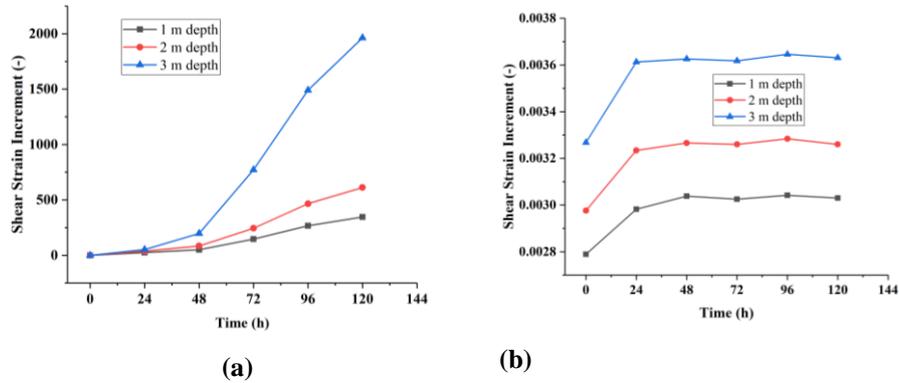


Fig.5. (a) Variation of shear strain increment at Section x-x, (b) Variation of shear strain increment at Section y-y.

6 Conclusions

The numerical simulations of rain-induced fluctuation are performed with finite difference method using FLAC. The effects of rain intrusion on the progressive slope deformations and the formation of a shear failure mechanism are studied. The rainfall intensities are applied over the slope right after the antecedent rainfall which provided initial conditions for the stability analysis. The variations of pore-water pressure and FOS under these rainfall intensities are evaluated for the saturated-unsaturated slope section. The strain responses of the slopes are evaluated under rainfall intrusion. The numerical results of the present study have greater assurance in the practical stability analysis of the rain-induced earth slope instability. Actual rainfall data can be utilized in the simulation of pore pressure generation there by giving the instruction about the stability of the slope. Based on the results obtained for the selected slope section, soil properties and rainfall intensities, the following results are drawn:

1. During rainfall infiltration, the pore pressures increased due to the dissipation of matric suction and increase in the groundwater table corresponding to the antecedent conditions of the slope. For the slope pore-water pressure increases for all the rainfall intensities.
2. For the slope section a FOS of 1.41 is obtained at the end of antecedent rainfall duration. The FOS values at 18 h reduce to unity indicating the slope is unstable.
3. The degree of saturation decreases after the applied antecedent total rainfall and there after remain constant.
4. Shear strain values indicate that the soil first becomes unstable at bottom then the instability extends to the top part of the slope

References

1. Ali, A., Huang, J., Lyamin, A. V., Sloan, S. W. and Cassidy, M. J.: Boundary effects of rainfall-induced landslides. *Computers and Geotechnics*, 61, 341-354 (2014).
2. Cai, F. and Ugai, K.: Numerical analysis of rainfall effects on slope stability. *International Journal of Geomechanics*, ASCE, 4(2), 69-78 (2004).
3. Chatra, A. S., Dodagoudar, G. R. and Maji, V. B.: Numerical modelling of rainfall effects on the stability of soil slopes. *International Journal of Geotechnical Engineering*, 03(5), 425-437 (2019).
4. Collins, B. D. and Znidarcic, D.: Stability analyses of rainfall induced landslides. *Journal of Geotechnical and Geoenvironmental Engineering*, ASCE, 130(4), 362-372 (2004).
5. Cruden, D. M.: A simple definition of landslide. *Bulletin of the International Association of Engineering Geology*, 27-29 (1991).
6. Dodagoudar, G. R. and Venkatachalam, G.: Reliability analysis of slopes using fuzzy sets theory. *Computers and Geotechnics*, 27, 101-115 (2000).
7. FLAC *FLAC Manual: Fluid-Mechanical Interaction*. Itasca Consulting Group Inc., Minneapolis, (2011).
8. Fredlund, D. G.: Unsaturated soil mechanics in engineering practice. *Geotechnical and Geoenvironmental Engineering*, 3, 286-321 (2000).
9. Gidon, J. S. and Sahoo, S.: Rainfall-Induced Slope Failures and Use of Bamboo as a Remedial Measure: A Review. *Indian Geotechnical Society*, 50, 766-783 (2020).
10. Ng, C. W. W. and Shi, Q.: A numerical investigation of the stability of unsaturated soil slopes subjected to transient seepage. *Computers and Geotechnics*, 22(1), 1-28 (1998).
11. Rabie, M.: Comparison study between traditional and finite element methods for slopes under heavy rainfall. *Housing and Building National Research Center*, 10, 160-168 (2014).
12. Tsaparas, I., Rahardjo, H., Toll, D. G. and Leong, E. C.: Controlling parameters for rainfall-induced landslides. *Computers and Geotechnics*, 29, 1-27 (2002).